

# Lecture 20

**Chemical Reaction Engineering (CRE)** is the field that studies the rates and mechanisms of chemical reactions and the design of the reactors in which they take place.

# Last Lecture

## Energy Balance Fundamentals

$$\sum F_{i0} E_{i0} - \sum F_i E_i + \dot{Q} - \dot{W} = \frac{dE_{sys}}{dt}$$

Substituting for  $\dot{W}$

$$\sum F_{i0} \overbrace{\left[ U_{i0} + P_0 \tilde{V}_{i0} \right]}^{H_{i0}} - \sum F_i \overbrace{\left[ U_i + P \tilde{V}_i \right]}^{H_i} + \dot{Q} - \dot{W}_S = \frac{dE_{sys}}{dt}$$

$$\sum F_{i0} H_{i0} - \sum F_i H_i + \dot{Q} - \dot{W}_S = \frac{dE_{sys}}{dt}$$


$$\dot{Q} - \dot{W}_S + \sum F_{i0} H_{i0} - \sum F_i H_i = 0$$

# Web Lecture 20

## Class Lecture 16-Thursday

- Reactors with **Heat Exchange**
- User friendly **Energy Balance** Derivations
  - Adiabatic
  - **Heat Exchange Constant  $T_a$**
  - **Heat Exchange Variable  $T_a$  Co-current**
  - **Heat Exchange Variable  $T_a$  Counter Current**

# Adiabatic Operation CSTR

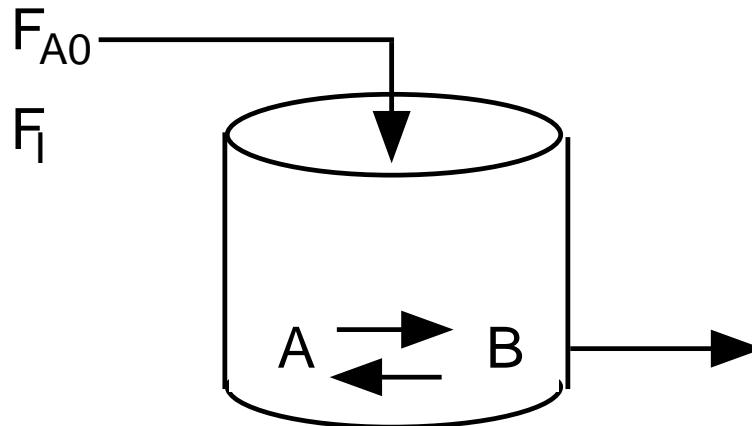

Elementary liquid phase reaction carried out in a **CSTR**

The feed consists of both - Inerts I and Species A with the ratio of inerts I to the species A being 2 to 1.

# Adiabatic Operation CSTR


- Assuming the reaction is irreversible for **CSTR**,  $A \rightarrow B$ , ( $K_C = 0$ ) what reactor volume is necessary to achieve 80% conversion?
- If the exiting temperature to the reactor is 360K, what is the corresponding reactor volume?
- Make a Levenspiel Plot and then determine the **PFR** reactor volume for 60% conversion and 95% conversion. Compare with the **CSTR** volumes at these conversions.
- Now assume the reaction is reversible, make a plot of the equilibrium conversion as a function of temperature between 290K and 400K.

# CSTR: Adiabatic Example

$$F_{A0} = 5 \frac{mol}{min}$$

$$T_0 = 300 K$$
$$F_I = 10 \frac{mol}{min}$$

$$\Delta H_{Rxn} = -20000 \frac{cal}{mol A} \text{ (exothermic)}$$

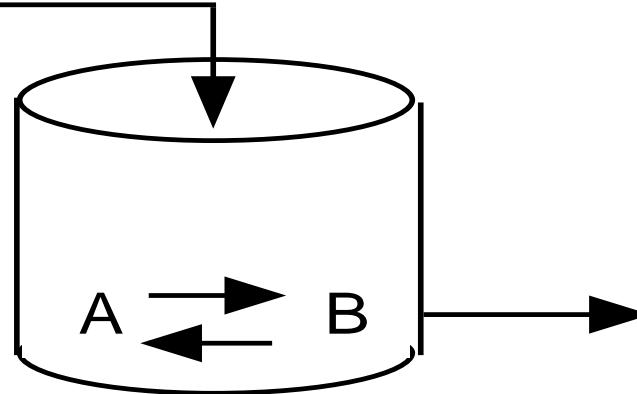

$$T = ?$$
$$X = ?$$

1) Mole Balances:

$$V = \frac{F_{A0} X}{-r_A|_{\text{exit}}}$$

# CSTR: Adiabatic Example

## 2) Rate Laws:

$$-r_A = k \left[ C_A - \frac{C_B}{K_C} \right]$$

$$k = k_1 e^{\frac{E}{R} \left( \frac{1}{T_1} - \frac{1}{T} \right)}$$

$$K_C = K_{C1} \exp \left[ \frac{\Delta H_{Rx}}{R} \left( \frac{1}{T_2} - \frac{1}{T} \right) \right]$$

## 3) Stoichiometry:

$$C_A = C_{A0} (1 - X)$$

$$C_B = C_{A0} X$$

# CSTR: Adiabatic Example

## 4) Energy Balance

Adiabatic,  $\Delta C_p = 0$

$$T = T_0 + \frac{(-\Delta H_{Rx})X}{\sum \Theta_i C_{P_i}} = T_0 + \frac{(-\Delta H_{Rx})X}{C_{P_A} + \Theta_I C_{P_I}}$$

$$T = 300 + \left[ \frac{-(-20,000)}{164 + (2)(18)} \right] X = 300 + \frac{20,000}{164 + 36} X$$


$$T = 300 + 100X$$

# CSTR: Adiabatic Example

Irreversible for Parts (a) through (c)

$$-r_A = kC_{A0}(1-X) \text{ (i.e., } K_C = \infty\text{)}$$

(a) Given X = 0.8, find T and V

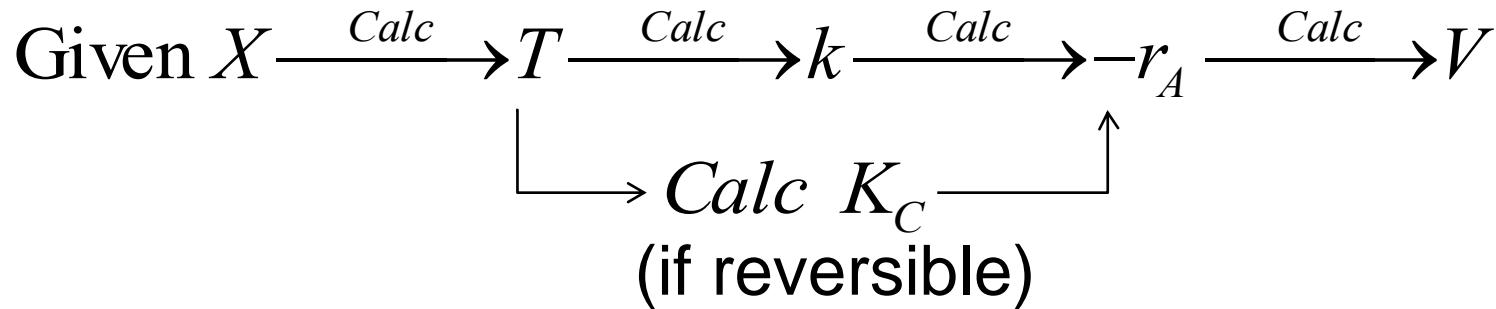

# CSTR: Adiabatic Example

Given X, Calculate T and V

$$V = \frac{F_{A0}X}{-r_A|_{\text{exit}}} = \frac{F_{A0}X}{kC_{A0}(1-X)}$$


$$T = 300 + 100(0.8) = 380\text{K}$$

$$k = 0.1 \exp \frac{10,000}{1.989} \left[ \frac{1}{298} - \frac{1}{380} \right] = 3.81$$

$$V = \frac{F_{A0}X}{-r_A} = \frac{(5)(0.8)}{(3.81)(2)(1-0.8)} = 2.82 \text{ dm}^3$$

# CSTR: Adiabatic Example

Given T, Calculate X and V

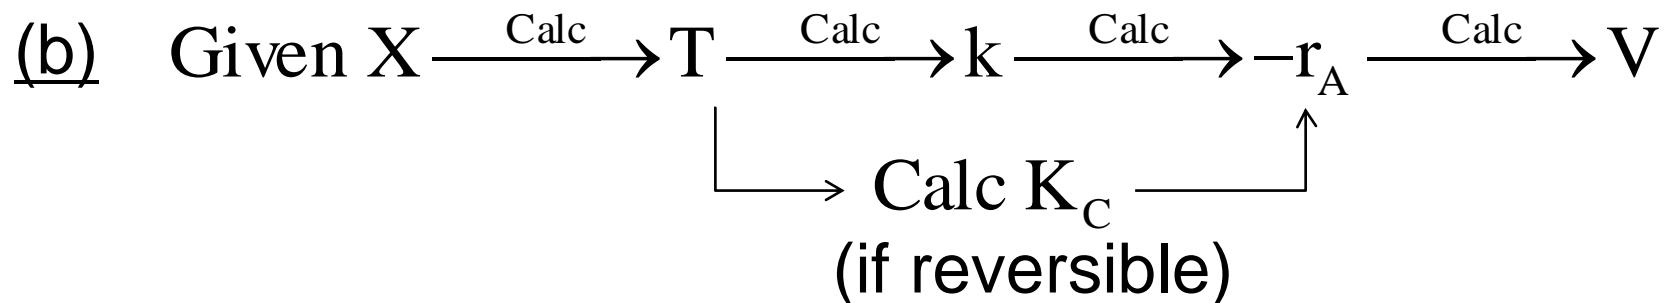

$$-r_A = kC_{A0}(1 - X) \text{ (Irreversible)}$$

$$T = 360K$$

$$X = \frac{T - 300}{100} = 0.6$$

$$k = 1.83 \text{ min}^{-1}$$

$$V = \frac{(5)(0.6)}{(1.83)(2)(0.4)} = 2.05 \text{ dm}^3$$

# CSTR: Adiabatic Example

## (c) Levenspiel Plot

$$\frac{F_{A0}}{-r_A} = \frac{F_{A0}}{kC_{A0}(1-X)}$$


$$T = 300 + 100X$$

Choose  $X \xrightarrow{\text{Calc}} T \xrightarrow{\text{Calc}} k \xrightarrow{\text{Calc}} -r_A \xrightarrow{\text{Calc}} \frac{F_{A0}}{-r_A}$

# CSTR: Adiabatic Example


## (c) Levenspiel Plot

X	T(K)	$\frac{F_{A0}}{-r_A} \left( \text{dm}^3 \right)$
0	300	25
0.1	310	14.4
0.2	320	9.95
0.4	340	5.15
0.6	360	3.42
0.8	380	3.87
0.9	390	4.16
0.95	395	8.0

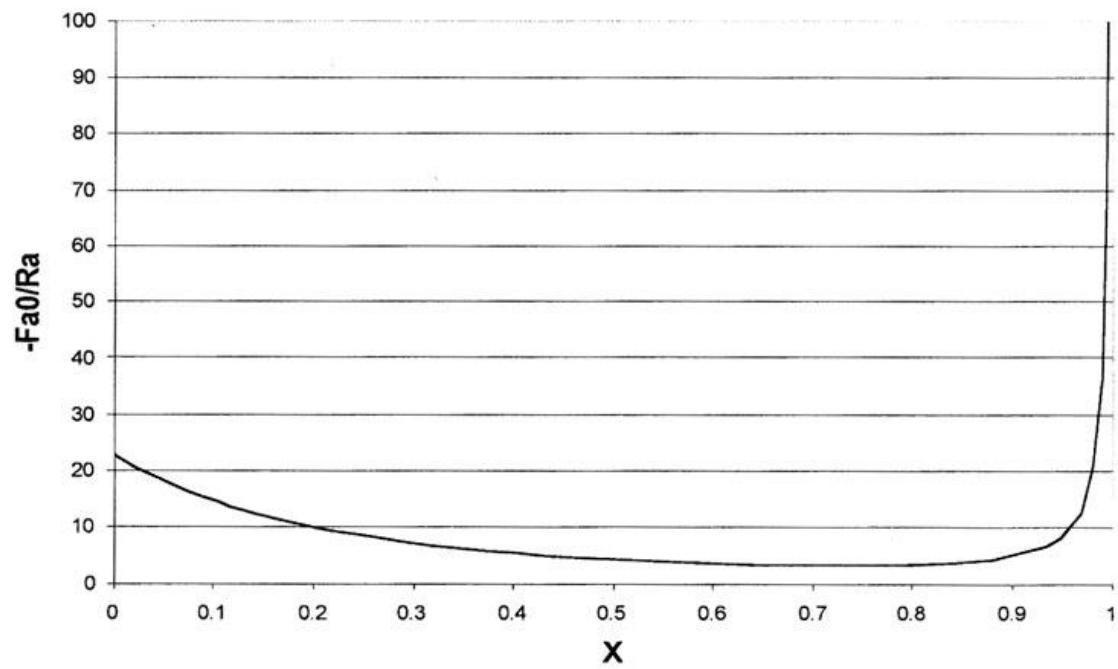


# CSTR: Adiabatic Example

CSTR     $X = 0.6$      $T = 360$  K

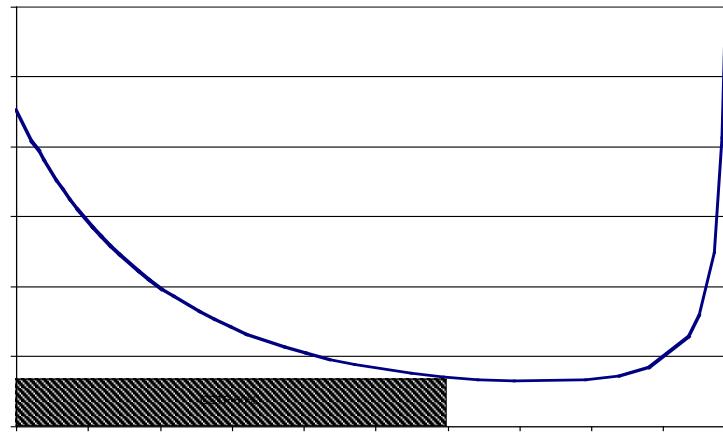


CSTR     $X = 0.95$      $T = 395$  K

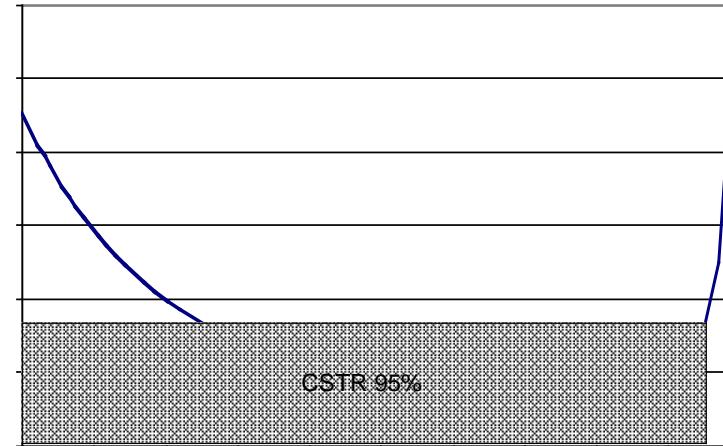


# CSTR: Adiabatic Example

PFR     $X = 0.6$

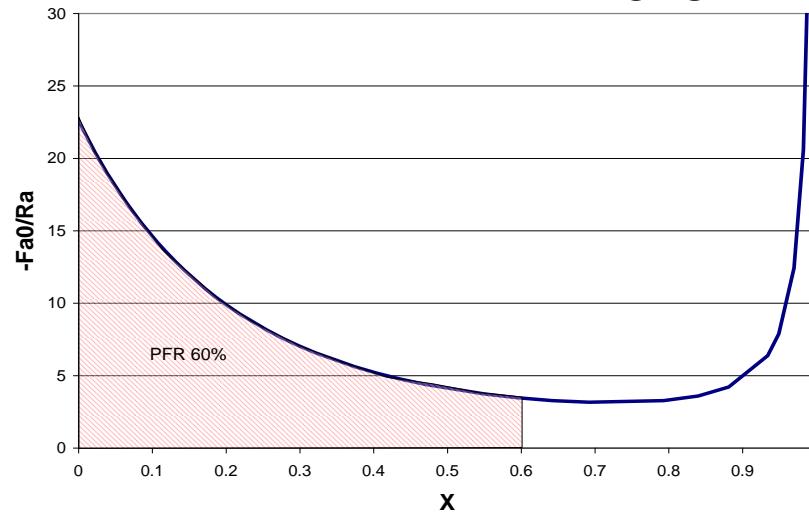

PFR     $X = 0.95$

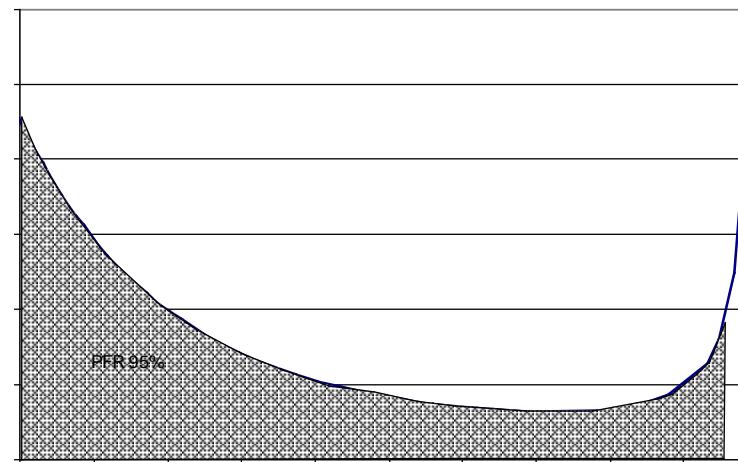

# CSTR: Adiabatic Example - Summary

<b>CSTR</b>	$X = 0.6$	$T = 360$	$V = 2.05 \text{ dm}^3$
<b>PFR</b>	$X = 0.6$	$T_{\text{exit}} = 360$	$V = 5.28 \text{ dm}^3$
<b>CSTR</b>	$X = 0.95$	$T = 395$	$V = 7.59 \text{ dm}^3$
<b>PFR</b>	$X = 0.95$	$T_{\text{exit}} = 395$	$V = 6.62 \text{ dm}^3$

# Energy Balance in terms of Enthalpy

$$\sum F_i H_i \Big|_V - \sum F_i H_i \Big|_{V+\Delta V} + Ua(T_a - T)\Delta V = 0$$

$$\frac{-d \sum F_i H_i}{dV} + Ua(T_a - T) = 0$$

$$\frac{-d \sum F_i H_i}{dV} = -\left[ \sum F_i \frac{dH_i}{dV} + \sum H_i \frac{dF_i}{dV} \right]$$

# PFR Heat Effects

$$\frac{dF_i}{dV} = r_i = v_i(-r_A)$$

$$H_i = H_i^0 + C_{Pi}(T - T_R)$$

$$\frac{dH_i}{dV} = C_{Pi} \frac{dT}{dV}$$

$$\frac{-d \sum F_i H_i}{dV} = - \left[ \sum F_i C_{Pi} \frac{dT}{dV} + \sum H_i v_i(-r_A) \right]$$

$$\sum v_i H_i = \Delta H_{Rx}$$

# PFR Heat Effects

$$-\left[ \sum C_{Pi} F_i \frac{dT}{dV} + \Delta H_R (-r_A) \right] + Ua(T_a - T) = 0$$

$$\sum F_i C_{Pi} \frac{dT}{dV} = \Delta H_R r_A - Ua(T - T_a)$$

$$\frac{dT}{dV} = \frac{(\Delta H_R)(-r_A) - Ua(T - T_a)}{\sum F_i C_{Pi}}$$

## Heat Exchange:

$$\frac{dT}{dV} = \frac{(-r_A)(-\Delta H_{Rx}) - U_a(T - T_a)}{\sum F_i C_{P_i}}$$

$\sum F_i C_{P_i} = F_{A0} \left[ \sum \Theta_i C_{P_i} + \Delta C_P X \right]$ , if  $\Delta C_P = 0$  then

$$\frac{dT}{dV} = \frac{(-r_A)(-\Delta H_{Rx}) - U_a(T - T_a)}{F_{A0} \sum \Theta_i C_{P_i}} \quad (16B)$$

Need to determine  $T_a$

# Heat Exchange Example:

## Case 1 - Adiabatic

### Energy Balance:

Adiabatic ( $U_a=0$ ) and  $\Delta C_p=0$

$$T = T_0 + \frac{(-\Delta H_{Rx})X}{\sum \Theta_i C_{P_i}} \quad (16A)$$

# User Friendly Equations

**A. Constant Ta e.g., Ta = 300K**

**B. Variable T<sub>a</sub> Co-Current**

$$\frac{dT_a}{dV} = \frac{Ua(T - T_a)}{\dot{m}C_{P_{cool}}}, V = 0 \quad T_a = T_{ao} \quad (17C)$$

**C. Variable T<sub>a</sub> Counter Current**

$$\frac{dT_a}{dV} = \frac{Ua(T_a - T)}{\dot{m}C_{P_{cool}}} \quad V = 0 \quad T_a = ? \text{ Guess}$$

Guess T<sub>a</sub> at V = 0 to match T<sub>a0</sub> = T<sub>a0</sub> at exit, i.e., V = V<sub>exit</sub>

# Heat Exchanger Energy Balance

## Variable $T_a$ Co-current

### Coolant Balance:

In - Out + Heat Added = 0

$$\dot{m}_C H_C \Big|_V - \dot{m}_C H_C \Big|_{V+\Delta V} + Ua\Delta V(T - T_a) = 0$$

$$-\dot{m}_C \frac{dH_C}{dV} + Ua(T - T_a) = 0$$

$$H_C = H_C^0 + C_{PC}(T_a - T_r)$$

$$\frac{dH_C}{dV} = C_{PC} \frac{dT_a}{dV}$$

$$\frac{dT_a}{dV} = \frac{Ua(T - T_a)}{\dot{m}_C C_{PC}}, \quad V = 0 \quad T_a = T_{a0}$$

# Heat Exchanger Energy Balance

## Variable $T_a$ Co-current

In - Out + Heat Added = 0

$$\dot{m}_C H_C \Big|_{V+\Delta V} - \dot{m}_C H_C \Big|_V + Ua\Delta V(T - T_a) = 0$$


$$\dot{m}_C \frac{dH_C}{dV} + Ua(T - T_a) = 0$$

$$\frac{dT_a}{dV} = \frac{Ua(T_a - T)}{\dot{m}_C C_{PC}}$$

# Heat Exchanger – Example

## Case 1 – Constant $T_a$

Elementary liquid phase reaction carried out in a PFR

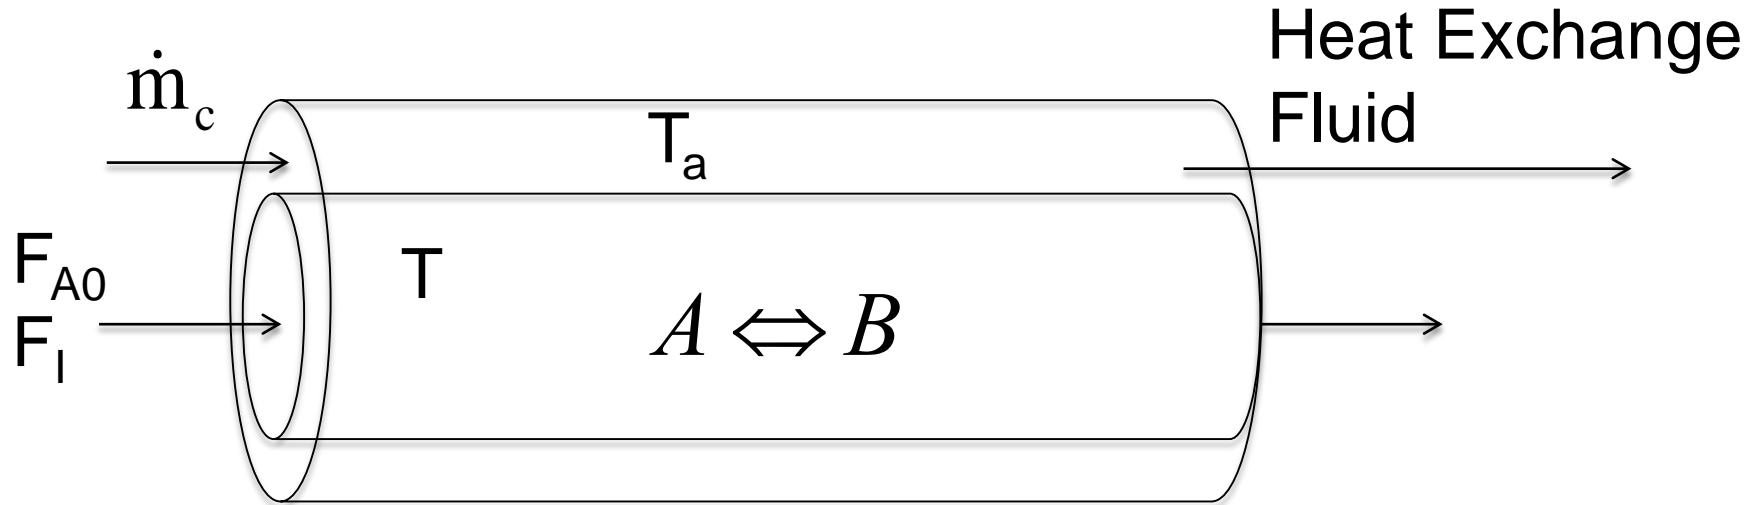

The feed consists of both inerts I and species A with the ratio of inerts to the species A being 2 to 1.

# Heat Exchanger – Example

## Case 1 – Constant $T_a$

1) Mole Balance:

$$(1) \frac{dX}{dV} = -r_A / F_{A0}$$

2) Rate Laws:

$$(2) r_A = -k \left[ C_A - \frac{C_B}{K_C} \right]$$

$$(3) k = k_1 \exp \left[ \frac{E}{R} \left( \frac{1}{T_1} - \frac{1}{T} \right) \right]$$

$$(4) K_C = K_{C2} \exp \left[ \frac{\Delta H_{Rx}}{R} \left( \frac{1}{T_2} - \frac{1}{T} \right) \right]$$

# Heat Exchanger – Example

## Case 1 – Constant $T_a$

3) Stoichiometry:  $C_A = C_{A0}(1 - X)$  (5)

$$C_B = C_{A0}X \quad (6)$$

4) Heat Effects:  $\frac{dT}{dV} = \frac{(\Delta H_R)(-r_A) - Ua(T - T_a)}{F_{A0} \sum \theta_i C_{Pi}}$  (7)  
 $(\Delta C_P = 0)$

$$X_{eq} = \frac{k_C}{1 + k_C} \quad (8)$$

$$\sum \theta_i C_{Pi} = C_{PA} + \theta_I C_{PI} \quad (9)$$

# Heat Exchanger – Example

## Case 1 – Constant $T_a$

**Parameters:**  $\Delta H_R$ ,  $E$ ,  $R$ ,  $T_1$ ,  $T_2$ ,  
 $k_1$ ,  $k_{C2}$ ,  $Ua$ ,  $T_a$ ,  $F_{A0}$ ,  
 $C_{A0}$ ,  $C_{PA}$ ,  $C_{PI}$ ,  $\theta_I$ ,  
 $rate = -r_A$

# PFR Heat Effects

Heat              Heat  
generated    removed



$$\frac{dT}{dV} = \frac{Q_g - Q_r}{\sum F_i C_{Pi}}$$

$$\sum F_i C_{Pi} = \sum F_{A0} (\theta_i + \nu_i X) C_{Pi} = F_{A0} \left[ \sum \theta_i C_{Pi} + \Delta C_{Pi} X \right]$$

$$\frac{dT}{dV} = \frac{(\Delta H_R)(r_A) - Ua(T - T_a)}{F_{A0} \left[ \sum \theta_i C_{Pi} + \Delta C_P X \right]}$$

# Heat Exchanger – Example

## Case 2 – Adiabatic

**Mole Balance:**

$$\frac{dX}{dV} = \frac{-r_A}{F_{A0}}$$

**Energy Balance:**

Adiabatic and  $\Delta C_P=0$

$Ua=0$

$$T = T_0 + \frac{(-\Delta H_{Rx})X}{\sum \Theta_i C_{P_i}} \quad (16A)$$

Additional Parameters  
(17A) & (17B)

$$T_0, \sum \Theta_i C_{P_i} = C_{P_A} + \Theta_I C_{P_I}$$

# Adiabatic PFR

## Differential equations

$$1 \frac{d(X)}{d(V)} = -ra/Fao$$

## Explicit equations

$$1 k1 = 0.1$$

$$2 Cao = 2$$

$$3 DH = -20000$$

$$4 To = 300$$

$$5 CpI = 18$$

$$6 Cpa = 164$$

$$7 ThetaI = 2$$

$$8 sumCp = Cpa + ThetaI * CpI$$

$$9 T = To + (-DH) * X / sumCp$$

$$10 Fao = 5$$

$$11 E = 10000$$


$$12 R = 1.987$$

$$13 T1 = 298$$

$$14 Ca = Cao * (1 - X)$$




$$15 k = k1 * exp(E/R * (1/T1 - 1/T))$$

In Class Problem 3/11/08

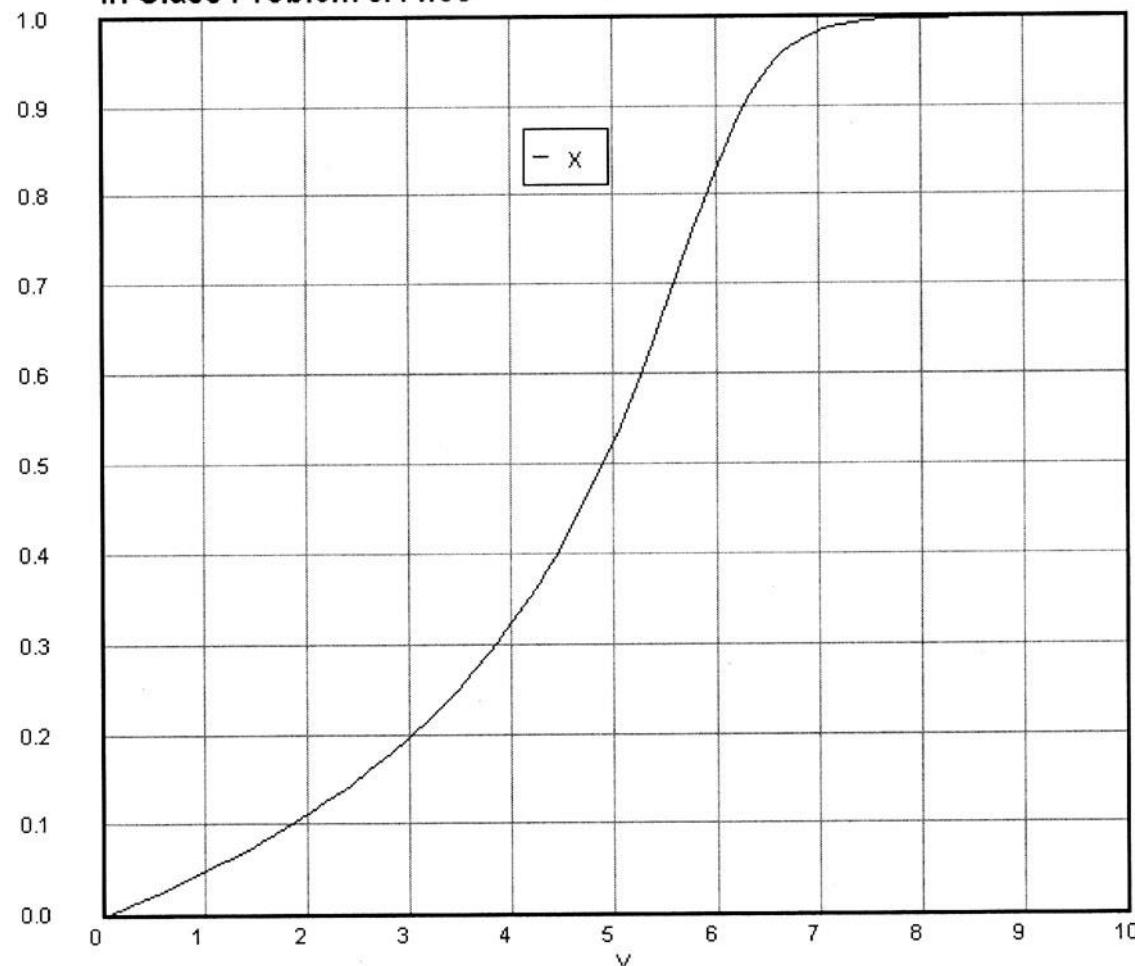

# Example: Adiabatic

Find conversion,  $X_{eq}$  and T as a function of reactor volume

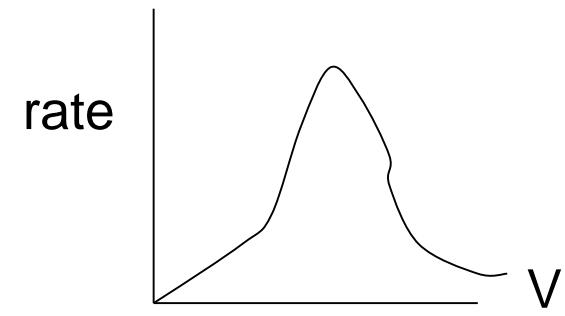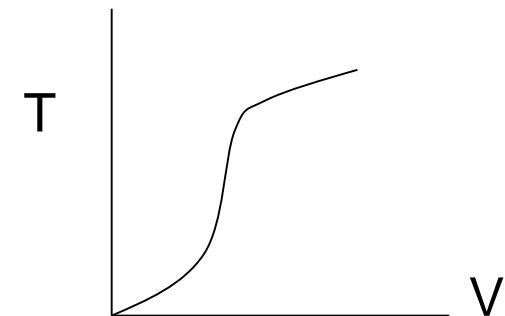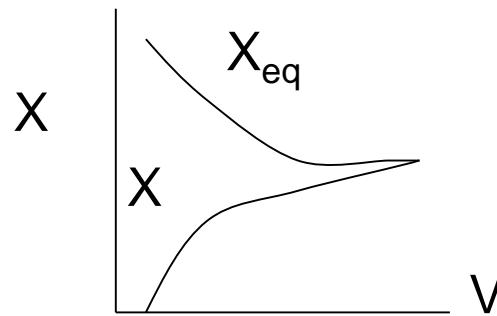

# Heat Exchange

$$\frac{dT}{dV} = \frac{(-r_A)(-\Delta H_{Rx}) - U_a(T - T_a)}{\sum F_i C_{P_i}}$$

$\sum F_i C_{P_i} = F_{A0} \left[ \sum \Theta_i C_{P_i} + \Delta C_P X \right]$ , if  $\Delta C_P = 0$  then

$$\frac{dT}{dV} = \frac{(-r_A)(-\Delta H_{Rx}) - U_a(T - T_a)}{F_{A0} \sum \Theta_i C_{P_i}} \quad (16B)$$

Need to determine  $T_a$

# User Friendly Equations

## A. Constant Ta (17B) $T_a = 300K$

Additional Parameters (18B – (20B):

$$T_a, \sum \Theta_i C_{P_i}, U_a$$

## B. Variable $T_a$ Co-Current

$$\frac{dT_a}{dV} = \frac{Ua(T - T_a)}{\dot{m}C_{P_{cool}}} \quad V = 0 \quad T_a = T_{ao} \quad (17C)$$

## C. Variable $T_a$ Countercurrent

$$\frac{dT_a}{dV} = \frac{Ua(T_a - T)}{\dot{m}C_{P_{cool}}} \quad V = 0 \quad T_a = ?$$

Guess  $T_a$  at  $V = 0$  to match  $T_{a0} = T_{a0}$  at exit, i.e.,  $V = V_f$

# Heat Exchange Energy Balance

## Variable $T_a$ Co-current

Coolant balance:

$$\text{In} - \text{Out} + \text{Heat Added} = 0$$

$$\dot{m}_C H_C|_V - \dot{m}_C H_C|_{V+\Delta V} + Ua\Delta V(T - T_a) = 0$$

$$-\dot{m}_C \frac{dH_C}{dV} + Ua(T - T_a) = 0$$

$$H_C = H_C^0 + C_{PC}(T_a - T_r)$$

$$\frac{dH_C}{dV} = C_{PC} \frac{dT_a}{dV}$$

$$\frac{dT_a}{dV} = \frac{Ua(T - T_a)}{\dot{m}_C C_{PC}}, \quad V = 0 \quad T_a = T_{a0}$$

All equations can be used from before except  $T_a$  parameter, use differential  $T_a$  instead, adding  $m_C$  and  $C_{PC}$

# Heat Exchange Energy Balance

## Variable $T_a$ Co-current

$$\text{In} - \text{Out} + \text{Heat Added} = 0$$

$$\dot{m}_C H_C \Big|_{V+\Delta V} - \dot{m}_C H_C \Big|_V + Ua\Delta V(T - T_a) = 0$$

$$\dot{m}_C \frac{dH_C}{dV} + Ua(T - T_a) = 0$$

$$\frac{dT_a}{dV} = \frac{Ua(T_a - T)}{\dot{m}_C C_{PC}}$$

All equations can be used from before except  $dT_a/dV$  which must be changed to a negative. To arrive at the correct integration we must guess the  $T_a$  value at  $V=0$ , integrate and see if  $T_{a0}$  matches; if not, re-guess the value for  $T_a$  at  $V=0$

# Derive the user-friendly Energy Balance for a PBR

$$\int_0^W \frac{Ua}{\rho_B} (T_a - T) dW + \sum F_{i0} H_{i0} - \sum F_i H_i = 0$$

Differentiating with respect to W:

$$\frac{Ua}{\rho_B} (T_a - T) + 0 - \sum \frac{dF_i}{dW} H_i - \sum F_i \frac{dH_i}{dW} = 0$$

# Derive the user-friendly Energy Balance for a PBR

**Mole Balance** on species i:

$$\frac{dF_i}{dW} = r_i' = v_i(-r_A')$$

Enthalpy for species i:

$$H_i = H_i^o(T_R) + \int_{T_R}^T C_{Pi} dT$$

# Derive the user-friendly Energy Balance for a PBR

Differentiating with respect to W:

$$\frac{dH_i}{dW} = 0 + C_{Pi} \frac{dT}{dW}$$

$$\frac{Ua}{\rho_B} (T_a - T) + r_A' \sum v_i H_i - \sum F_i C_{Pi} \frac{dT}{dW} = 0$$

# Derive the user-friendly Energy Balance for a PBR

$$\frac{Ua}{\rho_B} (T_a - T) + r_A' \sum v_i H_i - \sum F_i C_{Pi} \frac{dT}{dW} = 0$$

$$\sum v_i H_i = \Delta H_R(T)$$

$$F_i = F_{A0}(\Theta_i + v_i X)$$

Final Form of the Differential Equations in Terms of Conversion:

A:

$$\frac{dT}{dW} = \frac{\frac{Ua}{\rho_B} (T_a - T) + r_A' \Delta H_R(T)}{F_{A0} \left[ \sum \Theta_i \tilde{C}_{Pi} + \Delta \hat{C}_P X \right]} = f(X, T)$$

# Derive the user-friendly Energy Balance for a PBR

Final form of terms of Molar Flow Rate:

$$\frac{dT}{dW} = \frac{\frac{Ua}{\rho_B} (T_a - T) + r_A' \Delta H}{F_i C_{Pi}}$$

B:

$$\frac{dX}{dW} = \frac{-r_A'}{F_{A0}} = g(X, T)$$

# Reversible Reactions



The rate law for this reaction will follow an elementary **rate law**.

$$-r_A = k \left( C_A C_B - \frac{C_C C_D}{K_C} \right)$$

Where  $K_e$  is the concentration equilibrium constant. We know from Le Chaltlier's law that if the reaction is exothermic,  $K_e$  will decrease as the temperature is increased and the reaction will be shifted back to the left. If the reaction is endothermic and the temperature is increased,  $K_e$  will increase and the reaction will shift to the right.

# Reversible Reactions

$$K_C = \frac{K_P}{(RT)^\delta}$$

Van't Hoff Equation:

$$\frac{d \ln K_P}{dT} = \frac{\Delta H_R(T)}{RT^2} = \frac{\Delta H_R^\circ(T_R) + \Delta \hat{C}_P(T - T_R)}{RT^2}$$



# Reversible Reactions

For the special case of  $\Delta C_P = 0$

Integrating the Van't Hoff Equation gives:

$$K_P(T_2) = K_P(T_1) \exp \left[ \frac{\Delta H^o_R(T_R)}{R} \left( \frac{1}{T_1} - \frac{1}{T_2} \right) \right]$$

# Reversible Reactions

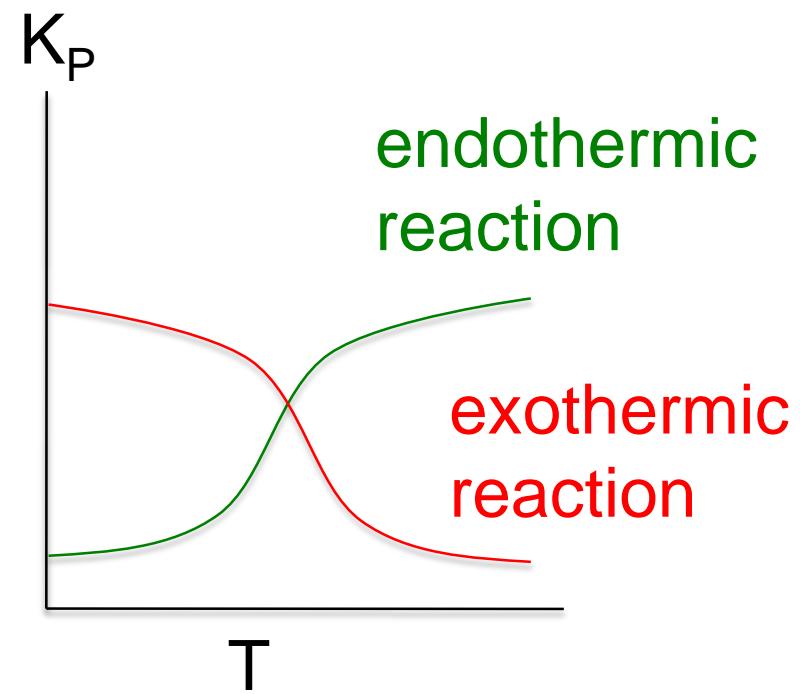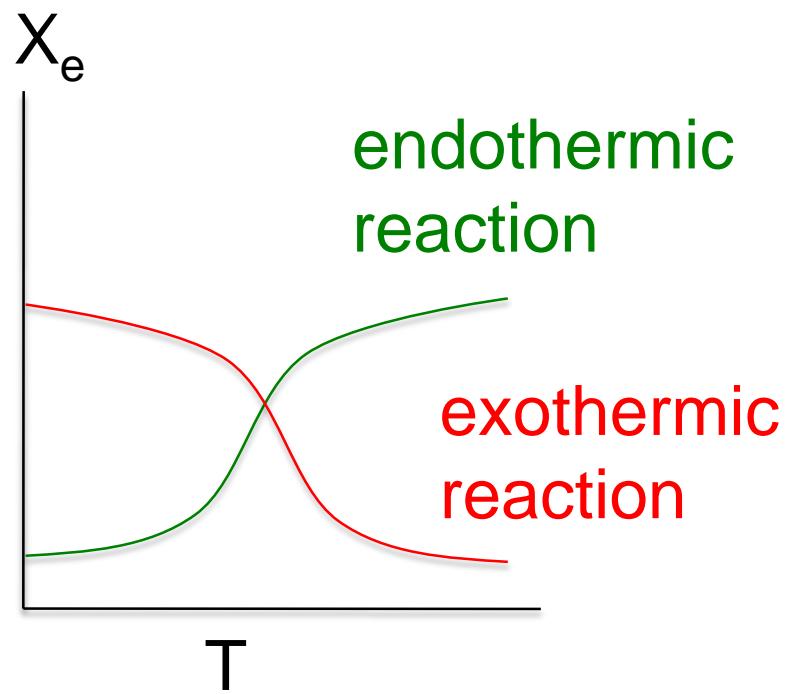

# End of Lecture 20