

Climbing a slippery slope

R. D. Deegan[†]

Department of Physics and Center for the Study of Complex Systems, University of Michigan, Ann Arbor, MI 48109, USA



Image used with permission from Sartori *et al.* (2019)

How a drop spreads across a solid surface is crucial to many applications in science and engineering. Yet, there is much we still do not understand about this phenomenon. In particular, situations where the edge of the drop moves rapidly across the surface remain obscure. There are two main issues: the effect of inertia and the presence of defects that are always present on ordinary surfaces and hinder the advancement of the liquid. Sartori *et al.* (*J. Fluid Mech.*, vol. 876, 2019) show how these effects can be separated in the case of climbing drops, a phenomenon where drops paradoxically climb an inclined vibrating plate.

Key words: drops, contact lines, capillary waves

1. Introduction

The flow of a film or drop over a solid surface is ubiquitous in industry and science, with applications in microfluidics, ink-jet printing, coatings and crop spraying, to name a few (Bonn *et al.* 2009). A prerequisite for understanding such phenomena is an accurate model of the contact line – the curve defined by the edge of the drop where the free surface meets the solid surface. For the drop to move, the contact line must also move. This seemingly obvious and innocuous statement hides a conundrum: moving the contact line while respecting the no-slip boundary condition leads to a divergence of the shear stress, or equivalently the dissipation rate. Research on this problem, though far from over, has proved to be a rich source of insights, as well as new physics and mathematics.

For a drop on a smooth homogeneous surface spreading due to capillarity, the motion of the contact line is largely understood (see, for example, Snoeijer & Andreotti 2013). The same cannot be said about inertia-dominated spreading, as occurs when a drop is subjected to vibrations or impacts a solid surface at speed. Moreover, most spreading applications must contend with contact line pinning – an effect epitomized by a drop tenaciously clinging to a windshield even when the car is in motion. Pinning is caused by microscopic irregularities that act as energy barriers hindering the motion of a drop, and are present on even the smoothest looking

[†] Email address for correspondence: rddeegan@umich.edu

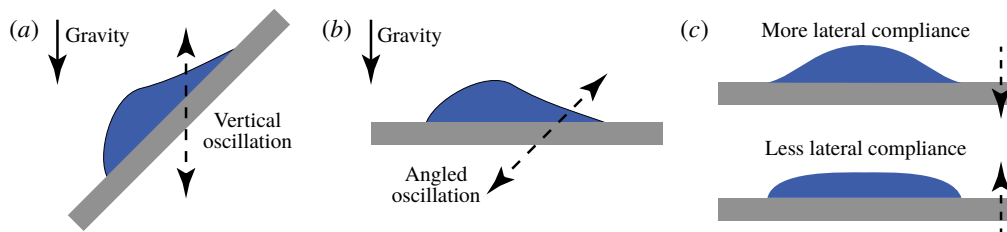


FIGURE 1. (a) Experimental configuration in climbing-drop experiments. A drop rests on an inclined substrate undergoing harmonic oscillations along the vertical axis. The drop moves rightwards on the substrate. (b) Alternative experimental configuration where gravity plays no role but the drop still moves rightwards. (c) Schematic indicating that the drop is more susceptible to sideways oscillations during the down stroke of the oscillation.

surfaces, such as glass (Good 1992; Mistura & Pierno 2017). In the quasistatic limit, pinning manifests as hysteresis in the relationship between contact line speed and the contact angle. Inertia-dominated spreading on a regular surface is currently poorly understood – partly because of the difficulty in disentangling pinning and inertia. In this issue, Sartori *et al.* (2019) investigate the motion of a drop induced by vibrations on a surface with very low hysteresis, shedding needed light on this regime.

2. Overview

Since the work of Daniel, Chaudhury & de Gennes (2005), it is known that drops can be moved across a surface with vibrations. (We omit from this discussion the surface acoustic wave technique, which also employs vibrations but with much higher frequencies.) They showed how a drop on a horizontal substrate vibrated in the horizontal direction with an anharmonic waveform will cause the drop to translate. Daniel *et al.* (2005) ascribed the movement to a ratchet-like response of the contact line in the presence of pinning. Brunet, Eggers & Deegan (2007) discovered that a drop will climb up an inclined substrate oscillated vertically with a sufficiently large harmonic amplitude. In their experiment, a drop of silicone oil was placed on an inclined plate of polymethylmethacrylate (PMMA) and vibrated in the vertical direction, as illustrated in figure 1(a). Initially the drop was pinned by the surface. Several thresholds for qualitatively different responses were observed as the amplitude of vibration was increased. Above the first threshold the drop moves down the plate. Above the next threshold the drop stops moving. Above yet a higher threshold the drop moves up the plate. This last regime was found to persist up to the highest accelerations obtainable with their apparatus. A typical phase diagram of this behaviour is shown in figure 2(a). Additional experiments by Brunet, Eggers & Deegan (2009) and Sartori *et al.* (2015) confirmed these results and extended them to other liquids.

While the ability of drops to climb may appear paradoxical at first glance, the experiments of Brunet *et al.* (2007) show that gravity is a confounding factor and the problem is better understood by configuring experiments as shown in figure 1(b), where the effect of gravity is nullified. In this configuration, drops are pinned at the lower accelerations, while above a threshold they de-pin and move to the right. Noblin, Kofman & Celestini (2009) showed that the problem is better conceptualized by decomposing the angled vibrations into vertical and horizontal components, with a phase difference that can be tuned to vary the mean speed of the drop from positive

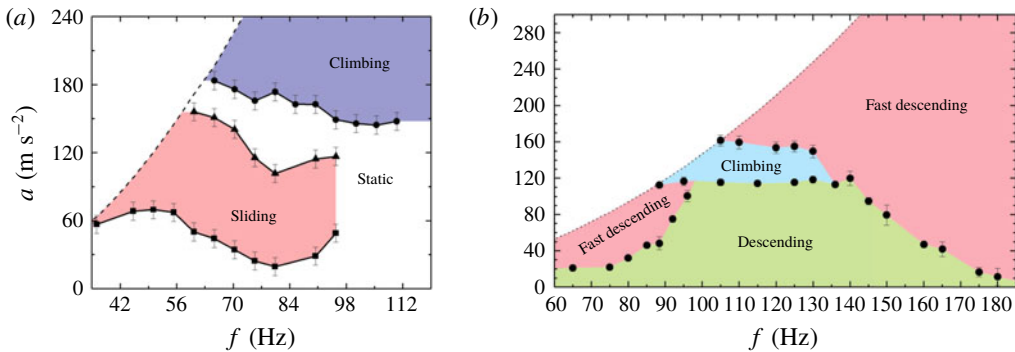


FIGURE 2. Phase diagram for a water drop (*a*) on a PMMA surface from (Sartori *et al.* 2015) and (*b*) on a LIS from Sartori *et al.* (2019). Note that the climbing region is reduced to a small patch on the LIS, whereas it is unbounded on the solid plate.

to negative. As shown in figure 1(c), the vertical oscillations alternately make the drop tall or flat, depending on the direction of the acceleration; superimposed horizontal vibrations will rock the drop more when the drop is tall, and thus more compliant, compared to when the drop is flattened and less compliant.

Various models with differing assumptions and approximations have been proposed to explain the cause of climbing drops (Benilov 2010; John & Thiele 2010; Benilov 2011; Benilov & Billingham 2011; Benilov & Cummins 2013; Borgia, Borgia & Bestehorn 2014; Sartori *et al.* 2015; Ding *et al.* 2018). A recent overview of these is given in Bradshaw & Billingham (2018). Recurring questions in these theoretical models are the role of and need for contact line hysteresis and the appropriate model for the contact line. All models are able to produce climbing drops, and all either explicitly show that contact line pinning is unnecessary or leave it out entirely.

Sartori *et al.* (2019) have performed the first experiments to directly address the issue of contact line pinning. They use a liquid impregnated surface (LIS) that consists of a silicone surface with photoresist pillars, silanized, and coated with a fluorinated oil. These surfaces can be made with vanishingly low hysteresis (Keiser *et al.* 2017), though Sartori *et al.* (2019) report that their LIS have a hysteresis of the order of 5° . As shown by the comparison of a solid surface with an LIS in figure 2, the experiments reveal that the climbing regime is almost extinguished on the LIS. This surprising result appears to be incompatible with all current models, though there may be some wiggle room because the substrate is actually a liquid, albeit highly viscous, and gummed up with pillars, rather than a solid. In addition, Sartori *et al.* (2019) find two distinct modes by which the drop can slide down the plate: distinguished primarily by the speed of descent, but also by the shape of the drop and phase of the contact area relative to the drive. The latter in particular is suggestive of the role of inertia.

3. Future

There are few model systems in which inertially dominated spreading can be studied easily with experiments. The work of Sartori *et al.* (2019) raises the possibility that the community now has a model system in which the effects of inertia on contact line dynamics can be disentangled from those of pinning. A number of interesting issues remain to be resolved. Are liquid impregnated surfaces a perfect substitute for the ideal non-pinning solid surface? Is contact line hysteresis necessary for the asymmetry

force to be significant? Does the climbing regime vanish in the zero-hysteresis limit? How would the experiments turn out in the nullified gravity configuration (figure 1b)? What causes the two distinct descending regimes of sliding?

References

- BENILOV, E. S. 2010 Drops climbing uphill on a slowly oscillating substrate. *Phys. Rev. E* **82**, 026320.
- BENILOV, E. S. 2011 Thin three-dimensional drops on a slowly oscillating substrate. *Phys. Rev. E* **84**, 066301.
- BENILOV, E. S. & BILLINGHAM, J. 2011 Drops climbing uphill on an oscillating substrate. *J. Fluid Mech.* **674**, 93–119.
- BENILOV, E. S. & CUMMINS, C. P. 2013 Thick drops on a slowly oscillating substrate. *Phys. Rev. E* **88**, 023013.
- BONN, D., EGGERS, J., INDEKEU, J., MEUNIER, J. & ROLLEY, E. 2009 Wetting and spreading. *Rev. Mod. Phys.* **81** (2), 739–805.
- BORCIA, R., BORCIA, I. D. & BESTEHORN, M. 2014 Can vibrations control drop motion? *Langmuir* **30** (47), 14113–14117.
- BRADSHAW, J. T. & BILLINGHAM, J. 2018 Thick drops climbing uphill on an oscillating substrate. *J. Fluid Mech.* **840**, 131–153.
- BRUNET, P., EGGERS, J. & DEEGAN, R. D. 2007 Vibration-induced climbing of drops. *Phys. Rev. Lett.* **99**, 144501.
- BRUNET, P., EGGERS, J. & DEEGAN, R. D. 2009 Motion of a drop driven by substrate vibrations. *Euro. Phys. J. Spec. Top.* **166**, 11–14; *7th Biannual European Coating Symposium, Paris, France*, Sep 12–14, 2007.
- DANIEL, S., CHAUDHURY, M. K. & DE GENNES, P. G. 2005 Vibration-actuated drop motion on surfaces for batch microfluidic processes. *Langmuir* **21** (9), 4240–4248.
- DING, H., ZHU, X., GAO, P. & LU, X.-Y. 2018 Ratchet mechanism of drops climbing a vibrated oblique plate. *J. Fluid Mech.* **835**, R1.
- GOOD, R. J. 1992 Contact-angle, wetting, and adhesion – a critical review. *J. Adhes. Sci. Technol.* **6** (12), 1269–1302.
- JOHN, K. & THIELE, U. 2010 Self-ratcheting Stokes drops driven by oblique vibrations. *Phys. Rev. Lett.* **104** (10), 107801.
- KEISER, A., KEISER, L., CLANET, C. & QUERE, D. 2017 Drop friction on liquid-infused materials. *Soft Matt.* **13** (39), 6981–6987.
- MISTURA, G. & PIERNO, M. 2017 Drop mobility on chemically heterogeneous and lubricant-impregnated surfaces. *Adv. Phys. X* **2** (3), 591–607.
- NOBLIN, X., KOFMAN, R. & CELESTINI, F. 2009 Ratchetlike motion of a shaken drop. *Phys. Rev. Lett.* **102** (19), 194504.
- SARTORI, P., GUGLIELMIN, E., FERRARO, D., FILIPPI, D., ZALTRON, A., PIERNO, M. & MISTURA, G. 2019 Motion of Newtonian drops deposited on liquid-impregnated surfaces induced by vertical vibrations. *J. Fluid Mech.* **876**, R4.
- SARTORI, P., QUAGLIATI, D., VARAGNOLO, S., PIERNO, M., MISTURA, G., MAGALETTI, F. & CASCIOLA, C. M. 2015 Drop motion induced by vertical vibrations. *New J. Phys.* **17**, 113017.
- SNOEIJER, J. H. & ANDREOTTI, B. 2013 Moving contact lines: scales, regimes, and dynamical transitions. In *Annual Review of Fluid Mechanics* (ed. S. H. Davis & P. Moin), vol. 45, pp. 269–292. Annual Reviews.